


Mechanical Specifications

D	15.0±1.0 mm
T	5.0±0.5 mm
Lead Diameter	0.8±0.1 mm
S	7.8 ±2.0mm
L	39.0±9.0 mm
Straight Leads Coating run down	5.0mm Max
B	7.5±0.70mm
C	2.82±0.5mm

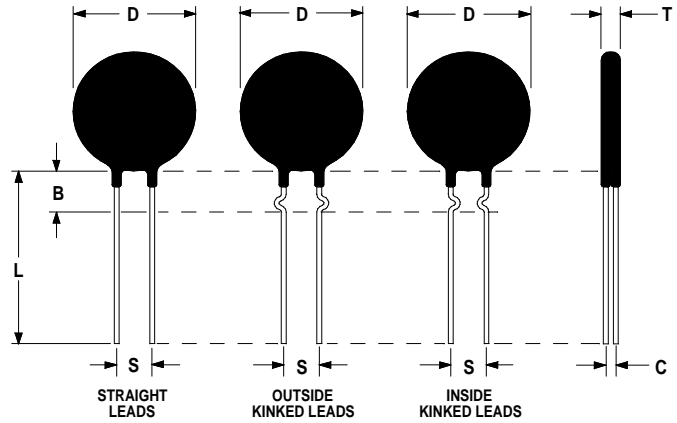

Electrical Specifications

Resistance @ 25°C	10.0 Ω ± 20%
Max Steady State Current Up to 65°C	6.0 A
Max recommended energy rating (Joules)	50.0 J
Actual failure point of instantaneous energy (Joules)	150.0J
Resistance @ 100% of Max Current	0.370 Ω
Body Temperature @ 100% Current rating	164°C
Dissipation Constant	15.9 mW/°C
Thermal Time Constant	54seconds
Material Type	"G"
Max cap @ 120 / 240 VAC	2779 / 695µF
Operating temperature range without de-rating.	-35°C to +70°C

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775-884-0670
www.Ametherm.com